

TECHNICAL SPECIFICATIONS SB184C

APPLICATION

- For subwoofer channel of a cinema soundtrack


PRODUCT-INFORMATION

The SB184C cinema subwoofer loudspeaker system uses a high power 18-in cone transducer mounted in an optimally vented enclosure to fill small to medium capacity theaters with high definition sub bass information at earth-shaking output levels.

The SB184C's optimally vented enclosure uses enclosure resonance to increase sub bass response while limiting driver excursion. This method produces less distortion and minimizes driver strain while extending sub bass response to the lower limits of human hearing. Special effects will have greater clarity, greater power and greater impact.


A two-terminal barrier-strip, which accommodates bare wire, tinned leads or spade lugs, is located on the side of the enclosure for convenient access in cramped installation areas.

The use of multiple SB184C's provides even greater output capability and further extends low frequency response.

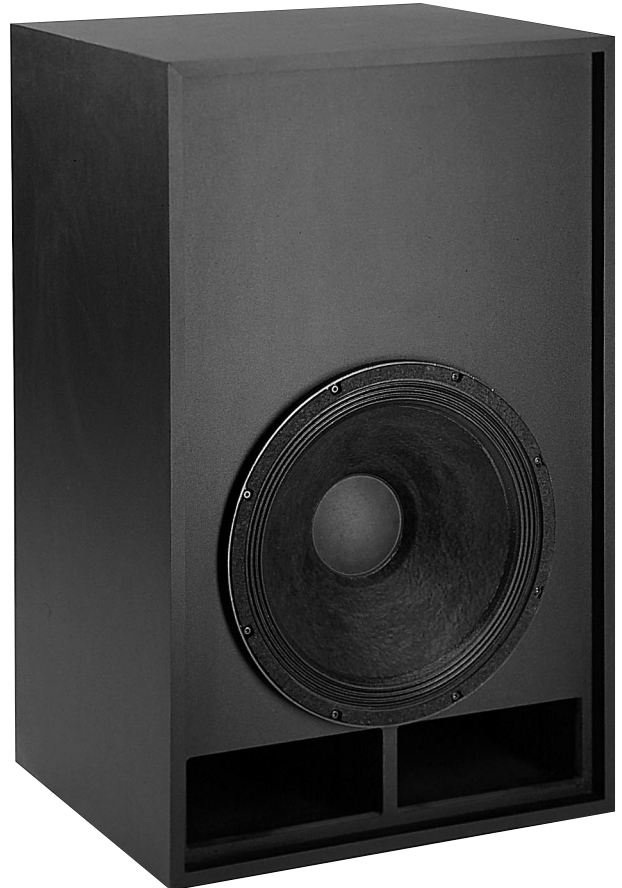

DESCRIPTIVE DATA

Part Number	999081	
Sub System & Loading	1x 18-in vented	
System Crossover	300 Hz max	
Recommended High-Pass Frequency (24 dB/Octave)	20 Hz	
Cabinet Type (shape)	Rectangular	
Enclosure Materials	3/4-in Medium Density Fiberboard, 15 mm baltic birch baffle	
Finish	Textured black	
Connectors	2-terminal barrier strip	
Grille	Vinyl coated perforated steel	
Dimensions	Inches	Centimeters
	Height	39.5 100.3
	Width	24.5 62.2
	Depth	21.00 53.3
Weights	Pounds	Kilograms
	Net Weight	95 43.2
	Shipping Weight	105 47.8

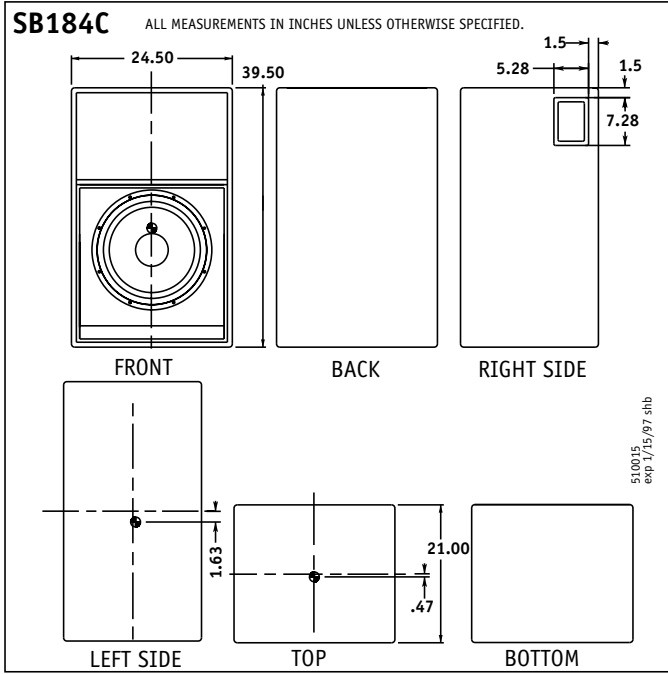

COMPONENTS & CONSTRUCTION

The SB184C is a high output, extended bandwidth subwoofer optimized specifically for cinema use. It features a high power 18-in low frequency transducer mounted in an optimally vented enclosure.

The enclosure is constructed of 3/4-in Medium Density Fiberboard except for the baffle plate which is 15 mm, void-free, gross-grain-laminated birch plywood. Extensive internal bracing is employed to minimize panel resonances resulting from the large acoustical energies generated within the enclosure and maximize acoustical energy transfer.

Input connectors are 2-terminal barrier strip, designed to accommodate bare wire, tinned leads or spade lugs.

All external components feature a textured, non-reflective, black finish to eliminate reflection of light through perforated cinema screens.

NOMINAL DATA

Frequency Response	_____
+3 dB	34 Hz - 500 Hz
Axial Sensitivity (dB SPL, 1 Watt @ 1m)	_____
	96
Impedance (Ohms)	_____
	8
Power Handling, AES Standard (Watts)	_____
	800
Maximum Output (dB SPL @ 1m)	_____
Peak	131
Long Term	125